


MODEL: CB12220-IT 12V22AH



Plane Chart:


Unit:(mm) Terminal type:(T8)

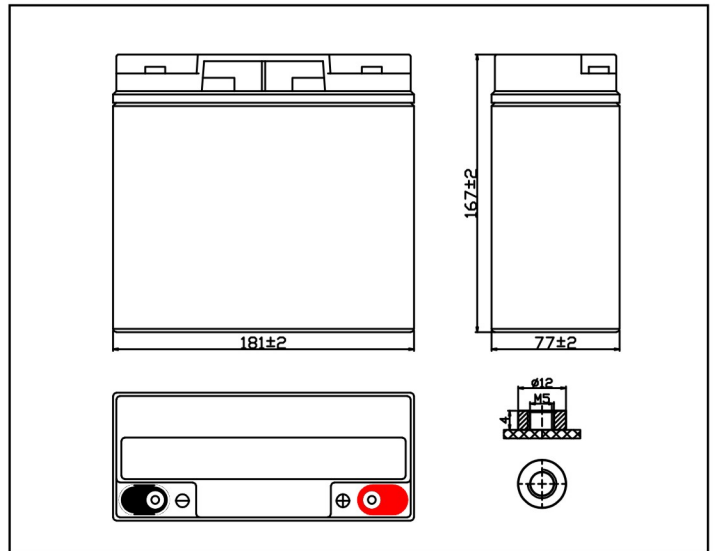


Parameter Chart:

Volts		12V	
Capacity(25°C)	20 hours rate (1.1A)	22Ah	
Discharge Current Testing (25°C)	20 I ₂₀ rate (22A,27min)	28min	
	60 I ₂₀ rate (66A,7min)	7min	
Internal Resistance	Full Charged Battery 25°C	12mΩ	
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than6.6A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight±3%		5.83Kg	

Residual Capacity

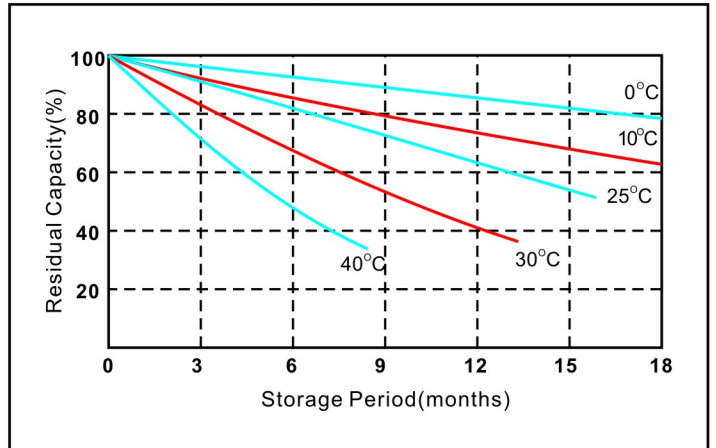


Discharge Current 25°C

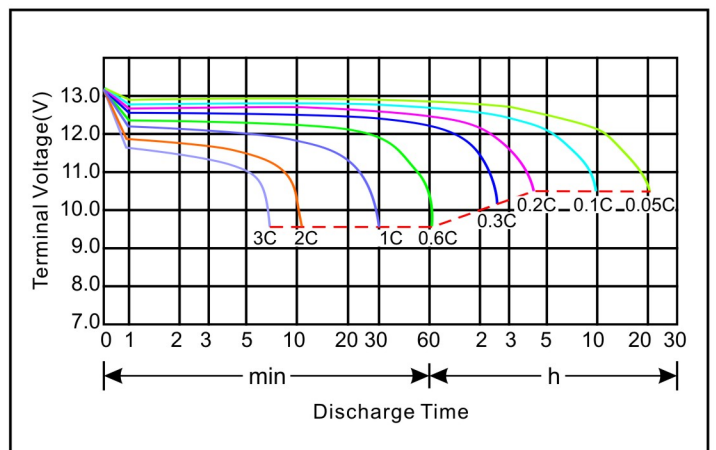


★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

MODEL: CB12220-IT 12V22AH

Constant voltage charging characteristics

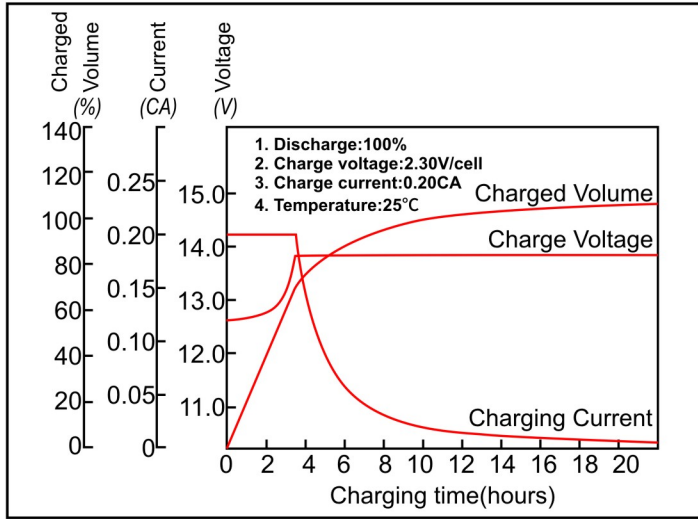

Float Life

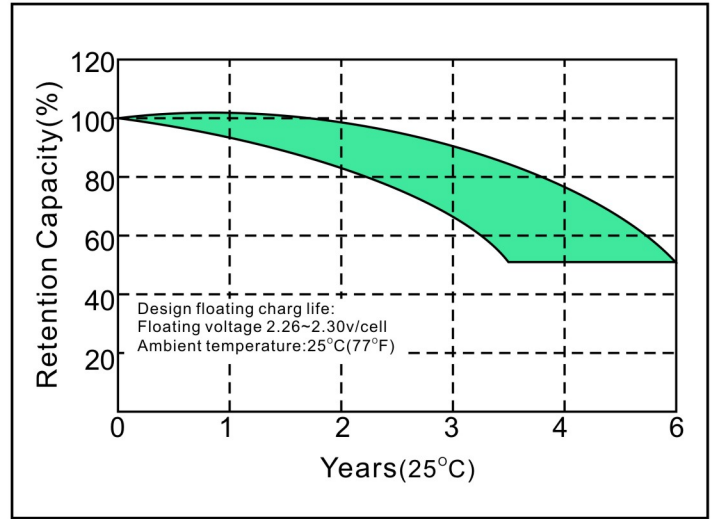

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	20min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	74.3	51.0	39.0	32.0	22.8	13.5	7.55	5.75	4.63	3.86	2.51	2.00	1.14
10.02V	70.4	49.2	38.0	31.4	22.2	13.3	7.45	5.69	4.55	3.83	2.49	2.07	1.13
10.20V	68.2	47.8	37.5	31.0	21.9	13.2	7.38	5.67	4.51	3.81	2.48	2.06	1.12
10.50V	66.8	45.7	36.8	30.5	21.5	13.0	7.32	5.61	4.46	3.77	2.44	2.04	1.10
10.80V	64.3	43.2	35.8	30.0	20.9	12.8	7.23	5.55	4.40	3.73	2.42	2.02	1.08

Constant Current Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	20min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	787.6	553.4	423.2	350.4	254.2	152.6	87.2	67.3	54.4	45.6	29.8	24.9	13.7
10.02V	749.8	536.3	414.2	345.4	247.5	150.3	86.0	66.6	53.5	45.3	29.5	24.6	13.6
10.20V	733.2	523.4	410.6	342.6	244.2	149.2	85.2	66.3	53.0	45.0	29.4	24.5	13.4
10.50V	724.8	502.7	404.8	338.6	239.7	146.9	84.5	65.6	52.4	44.6	28.9	24.3	13.2
10.80V	707.3	477.4	395.6	334.5	233.0	144.6	83.5	64.9	51.7	44.1	28.7	24.0	13.0

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.